

**MobileCollect Wireless  
 Wedge/USB Base Receiver**  
 Part #: MC-BASE-KW



**Features**

- Supports all MobileCollect Wireless transmitter models
- Supports U-Wave-T, TC, & TM transmitter models
- Supports CDI CORE & VRS “Long-Range” indicators
- Data transfer via USB serial connection to computer
- Power provided by USB computer connection
- Range up to 133 feet / 40 meters
- External read switch input
- Status LEDs
- Field upgradable firmware
- Made in the USA

**Specifications**

<b>Size</b>	3.63" x 2.61" x 1.10" (L x W x H)	<b>Baud Rates</b>	9600 - 19.2K - 38.4K baud
<b>Weight</b>	2.9 oz	<b>LED Status Indicators</b>	Power On Wireless Data Packet Received Received Signal Strength (3 LEDs)
<b>Range</b>	Up to 133' line of site indoors	<b>Output Format</b>	Multiple output options, configured via Windows PC setup program
<b>Power Requirements</b>	5VDC power supplied by computer USB port	<b>Frequency</b>	2.4 GHz (2.4000 to 2.4835) ISM band (Industrial, Scientific, & Medical)
<b>PC Connection</b>	RS-232 via USB port Keyboard wedge via USB port	<b>Operating Temperature &amp; Humidity</b>	32° to 122° F 90% humidity; non-condensing
<b>Read Switch Connectors</b>	One on front of unit. Option for two additional on front (3 total)	<b>Certifications</b>	FCC, IC, CE, RoHS, REACH


**Front View**



**Read Switch Connector**

**LED Status Indicators**

**Rear View**

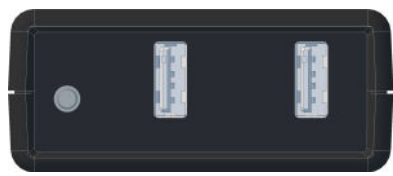

**Reset Button**

**USB keyboard Wedge Output**

**USB Serial Output**